

Integrated lifter



Configurable
upon request
(3 or 4 Decks
only).
6 weeks for
ex-works
delivery

for modular deck ovens Soleo

Performances

Designed for modular oven Soleo M3, M4 and M6

Use

Designed only for the Soleo modular deck ovens.
The integrated lifter is used to load and unload the baking chambers

Operating principle

Lifting system with chains and counterweight
Loader supplied with belt.

Construction

- Aluminium structure


• • • Important notes :

There is no intergrated lifter for the Soleo M2 modular deck oven.

The advantages

- It is possible for one person to load, in one movement, the whole deck.
- Easy to store
- Compact
- Easy to use

Integrated lifter for modular deck oven Soleo

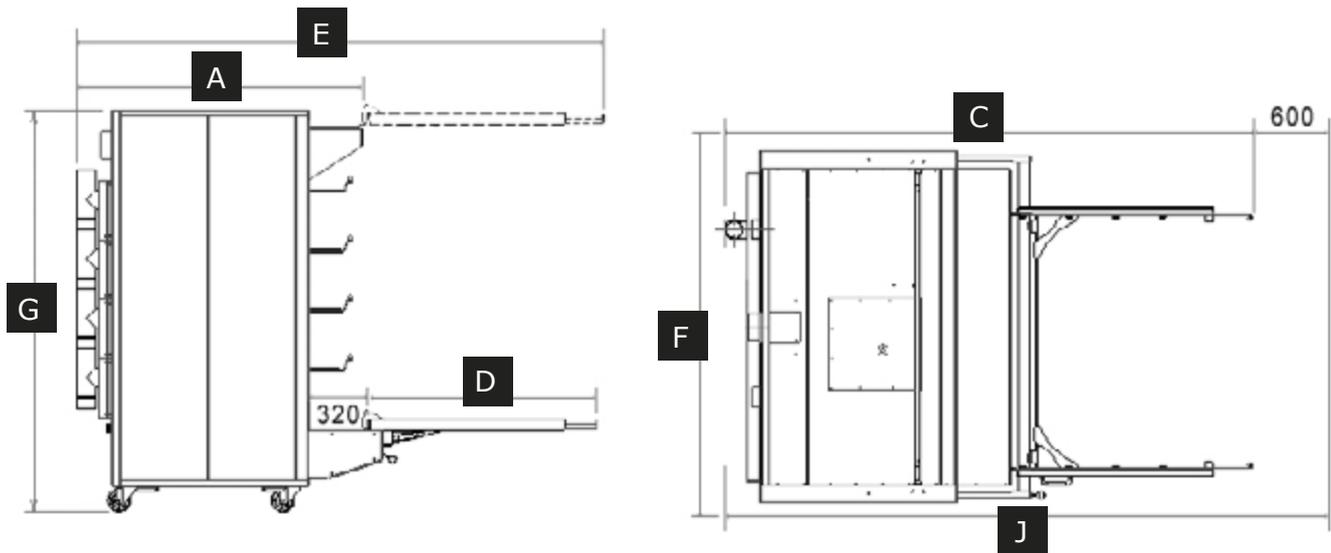

Technical features

Modèles	A	C	J	D	E	F	G	
M2	No integrated lifter for the Soleo M2 modular oven							
M3	(mm)	1718	3093	3693	1371	3258	2015 +350	2320
M4	(mm)	1838	3380	3980	1535	3545	1930 +350	2320
M6	(mm)	2223	4025	4625	1915	4190	1810 +350	2470

Example of loading height with 4 decks of 240mm (useful height)

Models	M3	M4	M6	
Top deck	(mm)	1601	1601	1746
Third deck	(mm)	1261	1261	1407
Second deck	(mm)	921	921	1067
First deck	(mm)	581	581	727
Minimum oven stand height	(mm)	540	540	686
Space available under the loader when in the high (storage) position	(mm)	1870	1970	2052